

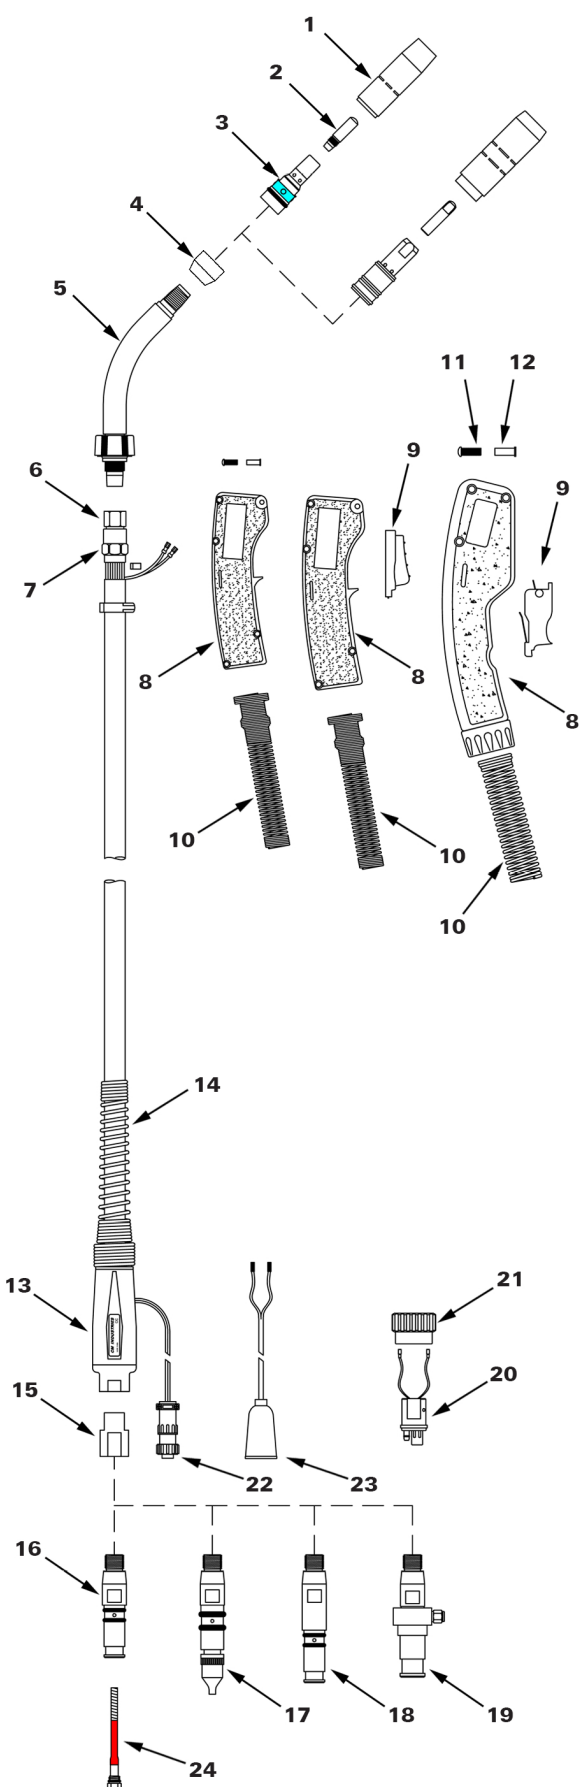
B-Series MIG Guns

Semi-Automatic, Air-Cooled, MIG Welding Gun



PARTS LIST

PARTS LIST - B-Series Replacement Parts for 200, 300, 400 & 500 Amps





ITEM #	PART #				DESCRIPTION
	Q20	Q30	Q40	Q50	
1	152-10-62C		152-30-62C		Nozzle, CMI Taper-LOCK™
	R401-5-62	R401-6-62			Nozzle, Tregaskiss™ Comparable
	B4391		B4491	B4591	Nozzle, Bernard™ Comparable
	See Nozzle Selection				Nozzle, Optional Available
2	See Contact Tip Selection				Contact Tip
3	154-R505				Diffuser, CMI Taper-LOCK™
	R404-20				Diffuser, Tough Lock™ Comparable
	B4335		B4435		Diffuser, Short Elliptical Tip
	B4235		B4635		Diffuser, Long Elliptical Tip
4	B10012				Neck Insulator, CMI Taper-LOCK™/Tough Lock™
	B4323R		B4423R		Neck Insulator, Elliptical
5	See Neck in Ordering Information				Neck
6	B4213B	B4313B		B4513B	End Fitting
7	B4305		B1540003	B4416	Cone Nut
8	B1880155		N/A		Handle Kit, Small
	N/A		B1880198	N/A	Handle Kit, Medium
	N/A			B4408	Handle Kit, Large
9	B5662			B4422	Trigger Assembly
10	B2520074		N/A		Spring for Small Handle
	N/A		B2520042	N/A	Spring for Medium Handle
	N/A			185-40-001	Spring for Large Handle
11	B4209			B4409	Handle Screw
12	B4207			B4407	Post Fastener
	B1880004			B4426	Screw/Post Kit
13	B2520066				Strain Relief Kit
14	B2520041S			B2520041	Strain Relief Spring
15	B1010027R				Adapter Block
16	214				Power Pin, Tweco® #4
17	214-1 214-116 214-332				Power Pin, Miller® Power Pin Cap, .023"-1/16" Power Pin Cap, 5/64"-3/32"
18	214-25				Power Pin, Lincoln® PM & LF
19	214-7				Power Pin, Lincoln® LN
20	B5060CM				Euro Connector Plug
21	B4816				Euro Connector Nut
22	BGN2021				Control Plug, Miller® / Lincoln® PM
23	B4719				Control Plug, Lincoln® LN & LF
24	See Liner Selection				Liner



Consumable Selection

Nozzles (Optional Available)



CM Industries Taper-LOCK™

	Light Duty	
	152-10-50C	1/2", 1/8" Recess
	152-10-62C	5/8", 1/8" Recess
	152-11-50C	1/2", 1/4" Recess
	152-12-50C	1/2", Flush
	152-13-50C	1/2", 1/8" Stickout
	152-13-62C	5/8", 1/8" Stickout
	Heavy Duty	
	152-30-50C	1/2", 1/8" Recess
	152-30-62C	5/8", 1/8" Recess
	152-31-562	5/8", 1/4" Recess
	152-32-62C	5/8", Flush
	152-33-62C	5/8", 1/8" Stickout
	152-34-62C	5/8", 1/4" Stickout

Comparable to Tregaskiss™




	Light Duty	
	R401-4-38	3/8", Flush
	R401-4-50	1/2", 1/8" Recess
	R401-4-62	5/8", 1/8" Recess
	R401-4-75	3/4", 1/8" Recess
	R401-8-62	5/8", 1/8" Stickout
	Heavy Duty	
	R401-5-50	1/2", 1/4" Recess
	R401-5-62	5/8", 1/4" Recess
	R401-5-75	3/4", 1/4" Recess
	R401-6-50	1/2", 1/8" Recess
	R401-6-62	5/8", 1/8" Recess
	R401-6-75	3/4", 1/8" Recess

Comparable to Bernard™




	200 & 300 Amp	
	B4391	Brass 5/8" I.D.
	B4393	Copper 5/8" I.D.
	B4392	Brass 1/2" I.D.
	B4394	Copper 1/2" I.D.
	B4295	Brass, Long - 11/32" I.D.
	400 & 500 Amp	
	B4491	Brass 3/4" I.D.
	B4591	Copper 3/4" I.D.
	B4492	Brass 9/16" I.D.
	B4592	Copper 9/16" I.D.
	B4495	Brass 5/8" I.D.
	B4591HD	Copper, H.D. 3/4" I.D.
	B4592HD	Copper, H.D. 9/16" I.D.

Contact Tips




CM Industries Taper-LOCK™ Contact Tips

	Heavy Duty	
	155-1-030	0.030" (0.8mm)
	155-1-035	0.035" (0.9mm)
	155-1-040	0.040" (1.0mm)
	155-1-045	.045" (1.2mm)
	155-1-364	3/64" (1.2mm)
	Heavy Duty - Tapered	
	155-2-030	0.030" (0.8mm)
	155-2-035	0.035" (0.9mm)
	155-2-040	0.040" (1.0mm)
	155-2-045	0.045" (1.2mm)
	155-2-364	3/64" (1.2mm)
	Heavy Duty	
	155-1-052	0.052" (1.4mm)
	155-1-062	0.062" (1.6mm)
	155-1-1.8	0.071" (1.8mm)
	155-1-564	5/64" (2.0mm)
	155-1-332	3/32" (2.4mm)
	155-1-764	7/64" (2.8mm)

Comparable to Bernard™ Elliptical Contact Tips

	Short	
	B7488	0.030" (0.8mm)
	B7489	0.035" (0.9mm)
	B7490	0.040" (1.0mm)
	B7491	0.045" (1.2mm)
	B7492	5/64" (2.0mm)
	Long	
	B1588	0.030" (0.8mm)
	B1589	0.035" (0.9mm)
	B1590	0.040" (1.0mm)
	B1591	0.045" (1.2mm)
	B1592	5/64" (2.0mm)
	Long	
	B1593	3/32" (2.4mm)
	B1594	7/64" (2.8mm)
	B1595	1/8" (3.2mm)
	B1596	0.040" (1.0mm)
	B1597	0.023" (0.6mm)
	B1598	0.052" (1.4mm)

Comparable to Tregaskiss™ Tough Lock™ Contact Tips

	Heavy Duty	
	R403-20-30	0.030" (0.8mm)
	R403-20-35	0.035" (0.9mm)
	R403-20-1.0	0.040" (1.0mm)
	R403-20-45	0.045" (1.2mm)
	R403-20-364	3/64" (1.2mm)
	Heavy Duty - Tapered	
	R403-21-30	0.030" (0.8mm)
	R403-21-35	0.035" (0.9mm)
	R403-21-1.0	0.040" (1.0mm)
	R403-21-45	0.045" (1.2mm)
	R403-21-52	0.052" (1.4mm)
	Extra Heavy Duty	
	R603-20-45	0.045" (1.2mm)
	R603-20-52	0.052" (1.4mm)
	R603-20-116	1/16" (1.6mm)
	R603-20-564	5/64" (2.0mm)
	R603-20-332	3/32" (2.4mm)

Liners

Universal Conventional Liners

10' (3.05m) Gun Lengths		15' (4.57m) Gun Lengths		25' (7.62m) Gun Lengths	
L3A-10	for 0.035" - 0.045" wire	L1A-15	for 0.023" - 0.030" wire	L1A-25	for 0.023" - 0.030" wire
L4A-10	for 0.045" - 1/16" wire	L2A-15	for 0.030" - 0.035" wire	L2A-25	for 0.030" - 0.035" wire
		L3A-15	for 0.035" - 0.045" wire	L3A-25	for 0.035" - 0.045" wire
		L4A-15	for 0.045" - 1/16" wire	L4A-25	for 0.045" - 1/16" wire
		L6A-15	for 5/64" wire	L6A-25	for 5/64" wire
		L7A-15	for 3/32" wire	L7A-25	for 3/32" wire
		L8A-15	for 7/64" - 1/8" wire	L8A-25	for 7/64" - 1/8" wire

Conventional Liners for Aluminum

10' (3.05m) Gun Lengths		15' (4.57m) Gun Lengths		25' (7.62m) Gun Lengths	
415-45-02	for 0.035" - 3/64" wire Polymer Liner	415-45-03	for 0.035" - 3/64" wire Polymer Liner	415-45-04	for 0.035" - 3/64" wire Polymer Liner
415-116-22	for 3/64" - 1/16" wire Polymer Liner	415-35-22	for 0.035" - 0.045" wire Steel Wrapped Nylon		
		415-116-2	for 0.045" - 1/16" wire Steel Wrapped Nylon		
		415-116-23	for 0.045" - 1/16" wire Polymer Liner		

Ordering Information

Amperage

BQ20	200 Amps
BQ30	300 Amps
BQ40	400 Amps
BQ50	500 Amps

Gun Length

08	8 ft. (2.44m)
10	10 ft. (3.05m)
12	12 ft. (3.66m)
15	15 ft. (4.57m)
20	20 ft. (6.16m)
25	25 ft. (7.63m)

Handle and Trigger

200, 300 Amp	A	Standard Trigger
Small Handle		
400 Amp	A	Standard Trigger
Medium Handle		
500 Amp	A	Standard Trigger
Large Handle		

BQ40 15 A E 4E M C*

Neck

A	Rotatable, Short	30°	BQT2-30
B	Rotatable, Short	45°	BQT2-45
C	Rotatable, Short	60°	BQT2-60
J	Rotatable, Short	80°	BQT2-80
D	Rotatable, Medium	30°	BQT3-30
E	Rotatable, Medium	45°	BQT3-45
F	Rotatable, Medium	60°	BQT3-60
K	Rotatable, Medium	80°	BQT3-80
G	Rotatable, Long	30°	BQT5-30
H	Rotatable, Long	45°	BQT5-45
I	Rotatable, Long	60°	BQT5-60
N	Fixed, Short	30°	BQT2-30
O	Fixed, Short	45°	BQT2-45
P	Fixed, Short	60°	BQT2-60
W	Fixed, Short	80°	BQT2-80
Q	Fixed, Medium	30°	BQT3-30
R	Fixed, Medium	45°	BQT3-45
S	Fixed, Medium	60°	BQT3-60
X	Fixed, Medium	80°	BQT3-80
T	Fixed, Long	30°	BQT5-30
U	Fixed, Long	45°	BQT5-45
V	Fixed, Long	60°	BQT5-60

Contact Tip

CMI Taper-LOCK™

4B	0.030" (0.8mm)	155-1-030
4C	0.035" (0.9mm)	155-1-035
4D	0.040" (1.0mm)	155-1-040
4E	0.045" (1.2mm)	155-1-045
4F	3/64" (1.3mm)	155-1-364
4H	0.052" (1.4mm)	155-1-052
4I	1/16" (1.6mm)	155-1-062
4K	5/64" (2.0mm)	155-1-564
4L	3/32" (2.4mm)	155-1-332

Comparable to Tregaskiss™

3B	0.030" (0.8mm)	R403-20-30
3C	0.035" (0.9mm)	R403-20-35
3D	0.040" (1.0mm)	R403-20-1.0
3E	0.045" (1.2mm)	R403-20-45
3R	3/64" (1.3mm)	R403-20-364
3H	0.052" (1.4mm)	R403-20-52
3I	1/16" (1.6mm)	R403-20-116
3K	5/64" (2.0mm)	R403-20-564
3L	3/32" (2.4mm)	R403-20-332

Power Pin

B	Bernard™
E	Euro
H	Hobart®
L	Lincoln® LN
S	Lincoln® LF/Power Feed
R	Lincoln® Power MIG
M	Miller®
O	OXO®
P	Panasonic®
T	Tweco® 4 (Standard Lead)
W	Tweco® 5 (Standard Lead)
X	Tweco® 5 (Miller Lead)

***Universal Conventional Liner**

CM Industries, Inc. is in no way affiliated with above-named manufacturers.

References to above-named parts, feeders, and part numbers are for your reference only.

SAFETY WARNINGS!

READ BEFORE USE



The symbols shown below are used throughout this manual to call attention to and identify possible hazards. When you see the symbol, watch out, and follow the related instructions to avoid the hazard. The safety information given below is only a summary of the more complete safety information found in the welding power source Owner's Manual.



Read and follow all Safety Standards.

Only qualified persons should install, operate, maintain, and repair this equipment. A qualified person is defined as one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated ability to solve or resolve problems relating to the subject matter, the work, or the project and has received safety training to recognize and avoid the hazards involved.



During operation, keep everybody, especially children, away.

ELECTRIC SHOCK can kill.

- Always wear dry insulating gloves.
- Insulate yourself from work and ground.
- Do not touch live electrode or electrical parts.
- Replace worn, damaged, or cracked guns or cables.
- Turn off welding power source before changing contact tip or gun parts.
- Keep all covers and handle securely in place.

FUMES AND GASES can be hazardous.

- Keep your head out of the fumes.
- Ventilate area, or use breathing device. The recommended way to determine adequate ventilation is to sample for the composition and quantity of fumes and gases to which personnel are exposed.
- Read and understand the Safety Data Sheets (SDSs) and the manufacturer's instructions for adhesives, coatings, cleaners, consumables, coolants, degreasers, fluxes, and metals.

WELDING can cause fire or explosion.

- Do not weld near flammable material.
- Do not weld on containers that have held combustibles, or on closed containers such as tanks, drums, or pipes unless they are properly prepared according to AWS F4.1 and AWS A6.0 (see Safety Standards).
- Watch for fire; keep extinguisher nearby.
- Read and understand the Safety Data Sheets (SDSs) and the manufacturer's instructions for adhesives, coatings, cleaners, consumables, coolants, degreasers, fluxes, and metals.

HOT PARTS can burn.

- Allow gun to cool before touching.
- Do not touch hot metal.
- Protect hot metal from contact by others.



MOVING PARTS can injure.

- Keep away from moving parts.
- Keep away from pinch points such as drive rolls.



ARC RAYS can burn eyes and skin.

Arc rays from the welding process produce intense visible and invisible (ultraviolet and infrared) rays that can burn eyes and skin. Sparks fly off from the weld.

- Wear an approved welding helmet fitted with a proper shade of filter lenses to protect your face and eyes from arc rays and sparks when welding or watching (see ANSI Z49.1 and Z87.1 listed in Safety Standards).
- Wear approved safety glasses with side shields under your helmet.
- Use protective screens or barriers to protect others from flash, glare and sparks; warn others not to watch the arc.
- Wear body protection made from durable, flame-resistant material (leather, heavy cotton, wool). Body protection includes oil-free clothing such as leather gloves, heavy shirt, cuffless trousers, high shoes, and a cap.



BUILDUP OF GAS can injure or kill.

- Shut off compressed gas supply when not in use.
- Always ventilate confined spaces or use approved air-supplied respirator.




NOISE can damage hearing.

- Noise from some processes or equipment can damage hearing.
- Check for noise level limits exceeding those specified by OSHA.
- Use approved ear plugs or ear muffs if noise level is high.
- Warn others nearby about noise hazard.



WELDING WIRE can injure.

- Keep hands and body away from gun tip when trigger is pressed.



READ INSTRUCTIONS.

- Read and follow all labels and the Owner's Manual carefully before installing, operating, or servicing unit.

Read the safety information at the beginning of the manual and in each section.

- Use only genuine replacement parts from the manufacturer.
- Perform installation, maintenance, and service according to the Owner's Manuals, industry standards, and national, state, and local codes.

CALIFORNIA PROPOSITION 65 WARNING

This product contains chemicals, including lead, known to the State of California to cause cancer, birth defects, or other reproductive harm. *Wash hands after use.*

(California Health & Safety Code Section 25249.5)